METHODS OF PRESSURIZING KEGS

PROJECT_		
ITEM#		

BEER PUMP SYSTEMS:

ALLOWS OPERATOR TO PRESSURIZE ALL KEGS WITH PURE CO2TO PROPERLY MAINTAIN NATURAL CARBONATION

BEER OUT TO TAP CO2 TO FROM KEGS KEGS PROS:

CONS:

- MAXIMIZES LIFE OF KEG SLIGHTLY MORE EXPENSIVE AT INITAL PURCHASE
- DELIVERS EXCELLENT BEER AT TAP
- REQUIRES MORE HARDWARE IN COOLER
- PURE CO2 IS BEST FOR FOR DRAUGHT BEER
- FLIMINATES HUMAN FRROR IN MANAGEMENT
- ALLOWS OPERATOR TO PRESSURIZE WITH PURE CO2 & NOT RISK OVERCARBONATION
- FLIMINATES NEED TO MANAGE NITROGEN OR LEASE NITROGEN GENERATOR
- BASY TO OPERATE... LOW MAINTENANCE... LOW POUR COST
- GAN BE USED TO DISPENSE STOUTS AS WELL AS ALL OTHER BEERS GUINNESS & CERTAIN STOUTS REQUIRE ALLEGALE 13 TO PRESSURIZE KEG
- LOCKING MECHANISMS KEEP PRESSURES AT FACTORY SETTINGS
- DEFORM STANDARD WITH BEER PUMP PANELS

DUAL BEER PUMP PANEL

PANEL SPECS:

- SINGLE BEER PUMP PANEL MEASURES 14" L x 17-1/2" H
- DUAL BEER PUMP PANEL MEASURES 22-1/2" L x 17-1/2" H
- PANELS ARE PREASSEMBLED WITH 7'6" GAS / BEER DROPS & ALL FITTINGS

PRESSURE SYSTEMS:

BEER OUT TO TAP

MECHANICALLY BLENDED SYSTEMS

USES BLENDED N & CO2 TO ENSURE PROPER CARBONATION WHILE MAXIMIZING LIFE OF KEGS

PROS:

CONS:

- LESS HARDWARD IN COOLER
- REQUIRES LESS SPACE ON COOLER WALLS OPERATOR RISKS SYSTEM SHUT DOWN IF NITROGEN THAN BEER PUMP PANELS
- DELIVERS EXCELLENT BEER AT TAP
- REQUIRES MANAGEMENT OF NITROGEN SUPPLIES
- TANK EMPTIES ~ SAFETY FEATURE ON BLENDER
- HIGHER POUR COST DUE TO COST OF NITROGEN
 - FOR LIFE OF SYSTEM

PRE-MIXED BEER GAS SYSTEMS ~ ALLEGALE 13


TANK OF PREMIXED GAS COMPOSED OF 75% N & 25% CO2 (1) SECONDARY REGULATOR PER KEG REQUIRED

- PROS: REQUIRES LITTLE HARDWARE FOR TAPPING KEGS
- LESS EXPENSIVE AT INITIAL PURCHASE
- USED FOR LOW VOLUME ACCOUNTS

- CONS:
- GAS IS EXPENSIVE TO PURCHASE CREATING HIGHER POUR COST
- CARBONATION LEVEL IS TOO LOW & BEER TENDS TO BE FLAT
- CONSUMED QUICKLY COMMON TO RUN OUT OF GAS & BEER SYSTEM SHUTS DOWN

PANEL SPECS:

- SINGLE REGULATOR PANEL MEASURES 4" L × 6" H
- SINGLE REGULATOR PANEL w/ FOB MEASURES 6-1/2" x 13" H
- PANELS ARE PREASSEMBLED WITH 7'6" GAS / BEER DROPS & ALL FITTINGS

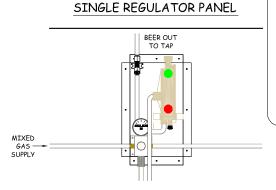

MIXED

GAS -SUPPLY

SINGLE REGULATOR PANEL w/ FOB

2371 GAUSE BLVD. WEST SLIDELL, LA 70460 P.O. BOX 5566 - ZIP 70469



www.CHILLRITE32.com 800.256,2190 - TOLL FREE 985.641.0183 - FAX

METHODS OF PRESSURIZING KEGS

PROJECT	
TTFM #	

MANIFOLD SYSTEMS:

BEER OUT TO TAP

CO2

TO

BEER PUMP & PRESSURE MANIFOLD SYSTEMS:

ALLOWS (1) KEG TO FEED MULTIPLE STATIONS OF BEER UP TO (3) PRODUCT LINES MAY BE PRESSURIZED FROM (1) KEG

PROS:

CONS

- □ HIGH KEG TURNOVER
- MORE PROFITABILITY FOR OPERATOR
- BEER WILL FLOW CLEARLY AT ALL
 - STATIONS WITH NO WASTE
- WHEN KEG EMPTIES IT IS EMPTY AT ALL STATIONS
- - OFFERED

SEE ALL PROS & CONS OF PUMP & PRESSURE SYSTEM

PANEL SPECS:

- BEER PUMP MANIFOLD PANEL MEASURES 22-1/2" L x 17-1/2" H
- PRESSURE MANIFOLD PANEL MEASURES 14" L x 17-1/2" H
 - PANELS ARE PREASSEMBLED WITH 7'6" GAS / BEER DROPS & ALL FITTINGS


EMPTY KEG DETECTOR (FOB)

BEER PUMP

MANIFOLD PANEL

BEER

- SIMULATES LIQUID LEVEL OF KEG & SHUTS OFF THE LINE WHEN KEG EMPTIES THUS KEEPING BEER LINE PRIMED WITH BEER AT ALL TIMES
- ELIMINATES FOAM WHEN KEG EMPTIES

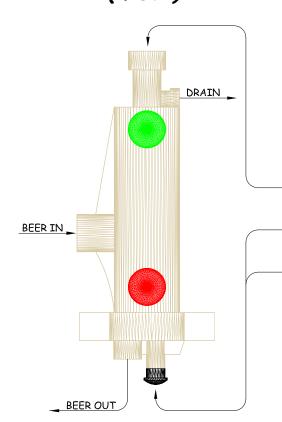

HOW TO PROPERLY RESET A FOB:

- (1) WHEN KEG EMPTIES, BALL WILL SETTLE AT BOTTOM OF DEVICE
- (2) TAP NEW KEG
- (3) DEPRESS AND HOLD WHITE VENT BUTTON ON TOP OF DEVICE UNTIL BEER FLOODS CYLINDER THEN RELEASE VENT
- (4) PUSH-IN KNOB ON BOTTOM OF DEVICE TO RELEASE BALL FROM SEAT AND BALL WILL FLOAT TO THE TOP
- (5) WHEN BALL IS FLOATING AT TOP OF CYLINDER THEN PULL KNOB OUT TO RESET DEVICE
- (6) SYSTEM IS BACK ON LINE

2371 GAUSE BLVD. WEST SLIDELL, LA 70460 P.O. BOX 5566 - ZIP 70469



www.CHILLRITE32.com 800.256.2190 - TOLL FREE 985.641.0183 - FAX